




TX6 PLUS and TX5e UTP Jack Modules


Part Numbers: CJ688TG**, CJD688TG**, CJ5E88TG**, CJD5E88TG**,
CJA5E88TG**, CJA688TG**

©Panduit Corp. 2007

INSTALLATION INSTRUCTIONS PN403B

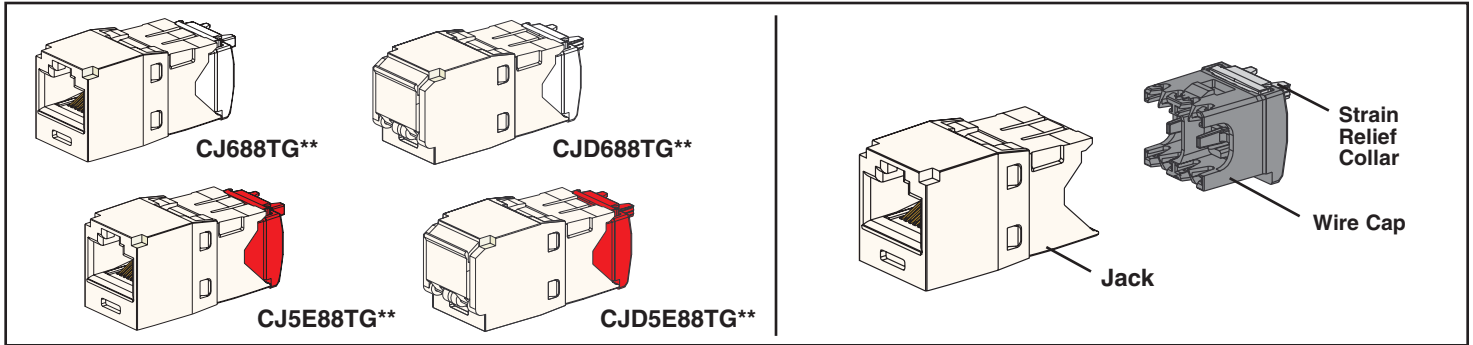


TERMINATION STEPS

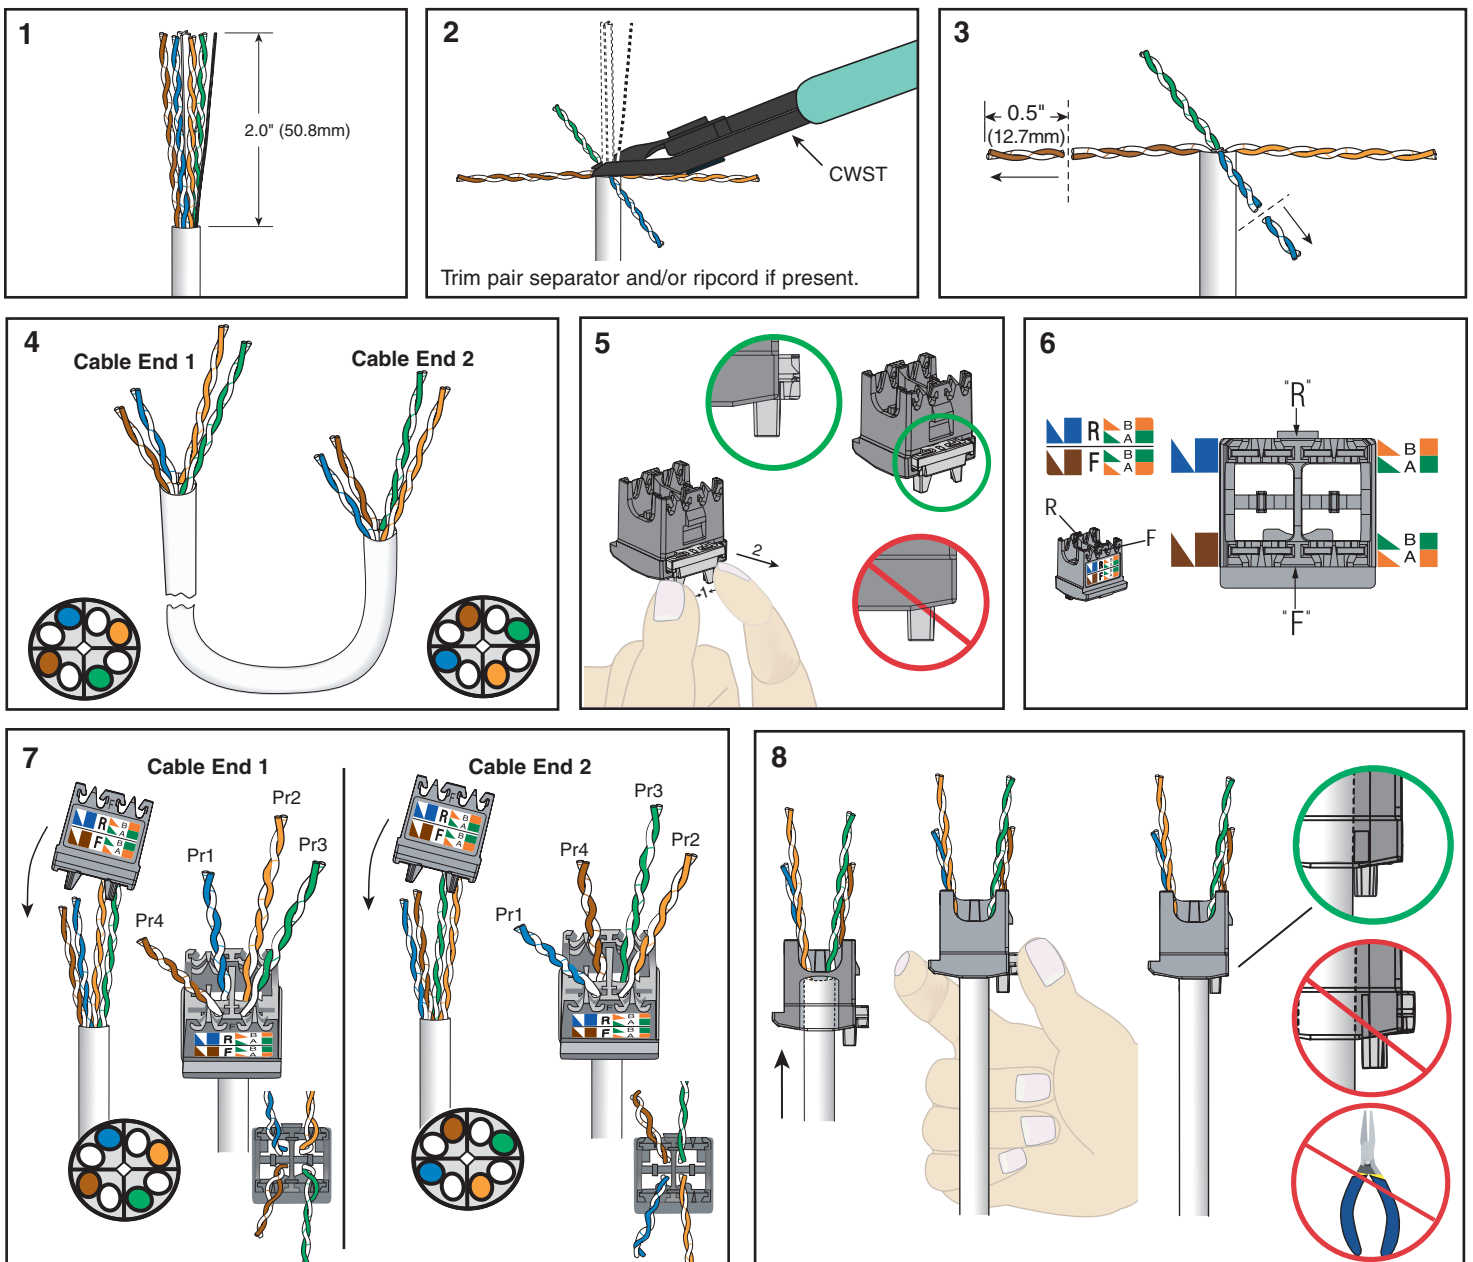


** Denotes jack module color code.

For Technical Support: www.panduit.com/resources/install_maintain.asp

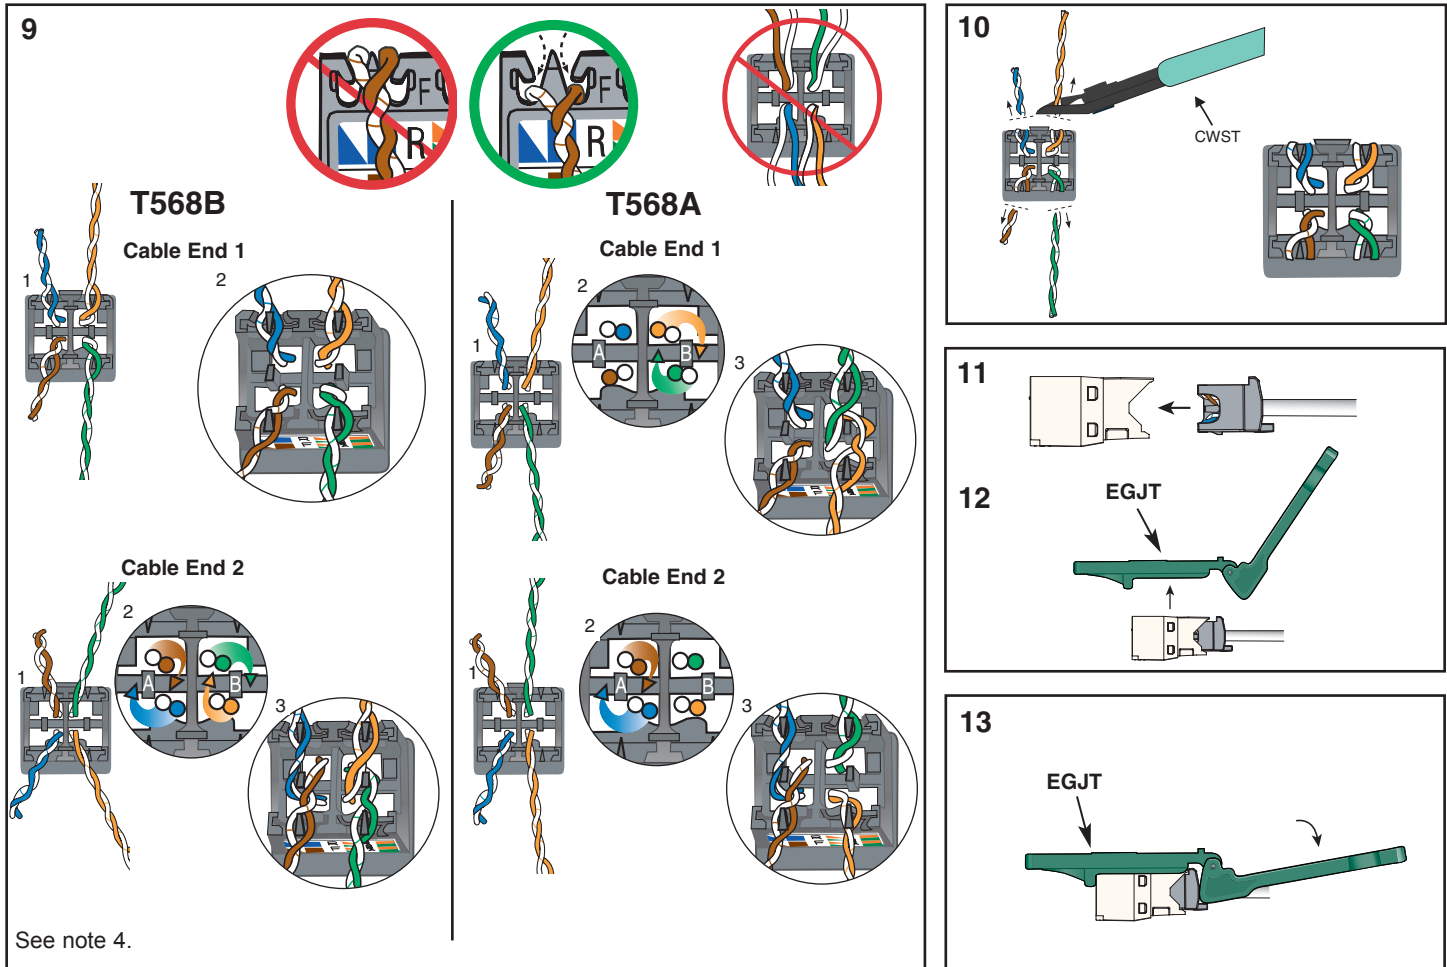

REMOVAL STEPS

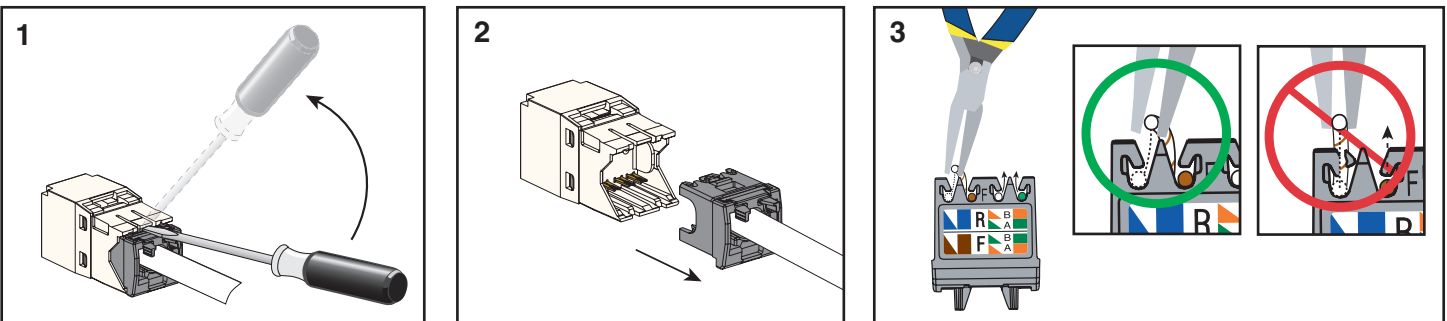

Notes:

1. For specified performance, follow TIA/EIA 568-B installation guidelines.
2. Jack Modules can terminate PVC or Plenum rated 22-26 AWG solid or stranded IWC cable with 0.048 inch (1.2 mm) maximum insulated conductor outside diameter.
3. Jack Modules may be re-terminated a minimum of 20 times.
4. On cable end 2 for A & B wiring and cable end 1 of A wiring, wrap the designated pairs around the proper center dividing post (A or B) and terminate in the proper location.
5. For technical and performance information, consult *PANDUIT* Technical Support.

As with all Communication Components, the following statements apply:

1. Never install communications wiring during a lightning storm.
2. Never install communications wiring in wet locations unless the jack is specifically designed for use in wet locations.
3. Never touch uninsulated communications wiring or terminals unless the communication line has been disconnected at the network interface.
4. Use caution when installing or modifying communication wiring.

For Instructions in Local Languages
and Technical Support:

http://www.panduit.com/resources/install_maintain.asp



E-mail:
cs@panduit.com

Fax:
(708) 444-6993